

RIPPLE

80/100/120/150/180W LED High Bay




ORDER INFORMATION

Item No.	Total Power	LED Supply	Power Supply	Luminous Flux	Flux Efficiency	Warranty
HBA01-08011	80W	NICHIA	MeanWell(HLG)	10800LM	135LM/W	7years
HBA01-08022	80W	PHILIPS	MeanWell(ELG)	10800LM	135LM/W	5years
HBA01-08032	80W	SANAN	MeanWell(ELG)	12000LM	150LM/W	5years
HBA01-10011	100W	NICHIA	MeanWell(HLG)	13500LM	135LM/W	7years
HBA01-10022	100W	PHILIPS	MeanWell(ELG)	13500LM	135LM/W	5years
HBA01-10032	100W	SANAN	MeanWell(ELG)	15000LM	150LM/W	5years
HBA01-12011	120W	NICHIA	MeanWell(HLG)	16200LM	135LM/W	7years
HBA01-12022	120W	PHILIPS	MeanWell(ELG)	16200LM	135LM/W	5years
HBA01-12032	120W	SANAN	MeanWell(ELG)	18000LM	150LM/W	5years
HBA01-15011	150W	NICHIA	MeanWell(HLG)	20250LM	135LM/W	7years
HBA01-15022	150W	PHILIPS	MeanWell(ELG)	20250LM	135LM/W	5years
HBA01-15032	150W	SANAN	MeanWell(ELG)	22500LM	150LM/W	5years
HBA01-18011	180W	NICHIA	MeanWell(HLG)	24300LM	135LM/W	7years

OTHER INFORMATION

Input Voltage	AC220-240V / AC100-277V	Storage Temperature Range	-40~+70℃
Power Frequency	50/60Hz	Operating Temperature Range	-40~+50℃
CCT	3000K,4000K,5000K	Operating Humidity Range	15~90%RH
Ra	>70,>80	Protection Level	IP42
Dimension(L*W*H)	270MMX270MMX130MM	Fixture Color	Black、White

Dimension Diagram

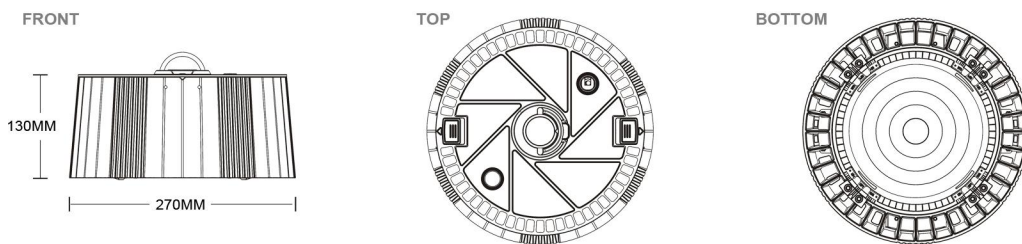

Beam Angle

